



ERX 2000










Important product
information (1 2 4)

www.deltadore.com






	230 V~, 50 Hz 1 VA		54 x 140 x 25 mm
	16 max.	IP	IP 44
 ERX	2 max.	CE	R&TTE 1999/5/CE
	868 MHz (EN 300 220) 100 m	°C Stockage / Storage	-10°C / +70°C
		°C Utilisation / Use	-20°C / +60°C










ERX 2000 N°1



ON
230V~
50 Hz

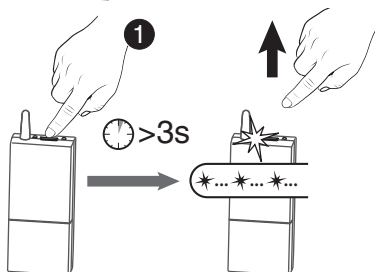

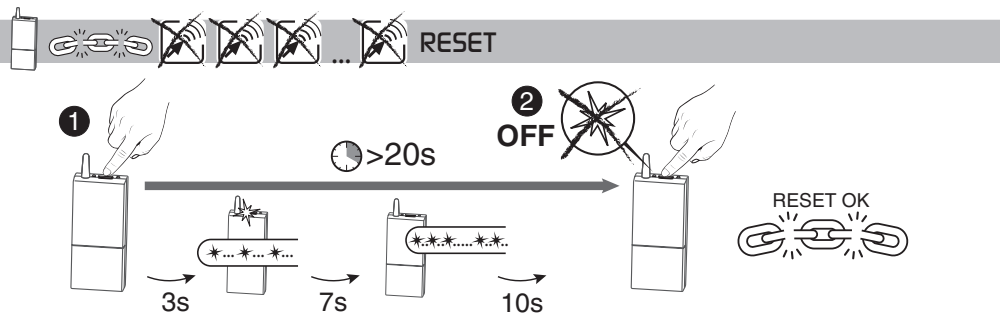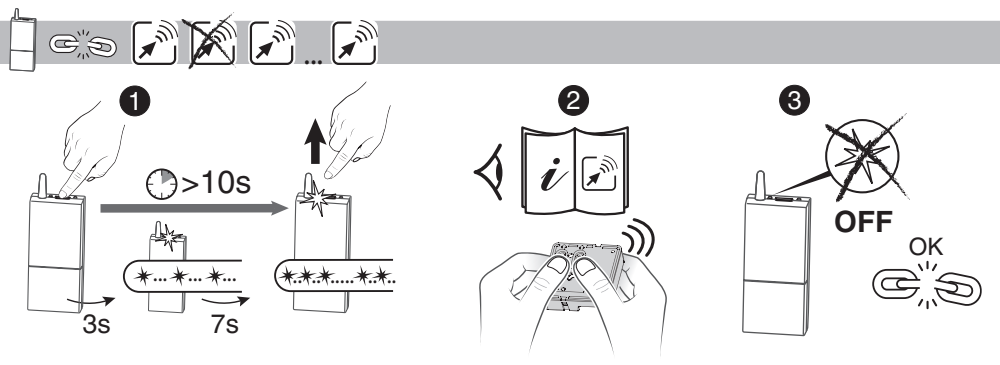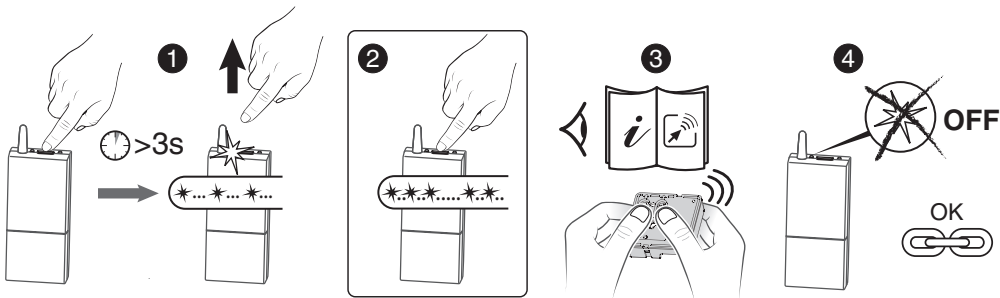

... ..

.....

 $> 3s$



OFF