



TYBOX 5100 / TYBOX 5101

www.deltadore.com



Important product
information (24)



X3D


	TYBOX 5100	
	RF 6000	TYBOX 5101
	230 V~, 50 Hz - 1,8 VA	2 x 1,5V - AAA LR03
		
	868 MHz (EN 300 220) 100 m	
	16 max.	
°C	-5°C / +40°C	
	54 x 140 x 25 mm	80 x 84 x 21 mm
	R&TTE 1999/5/CE	
	5 A max., 230V~	/




1



2

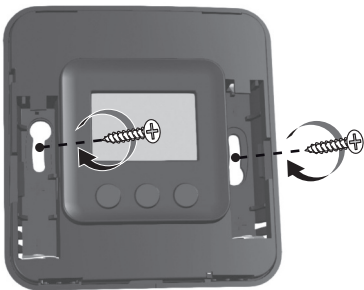


3

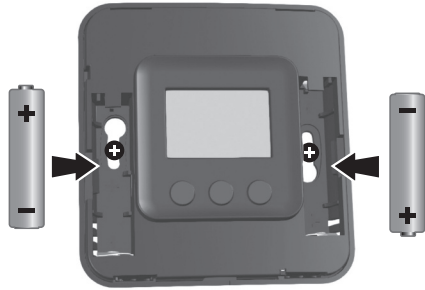

2 x 1,5V - AAA LR03


4



RF 6000


1

OFF
230V~
50 Hz





2

4



5

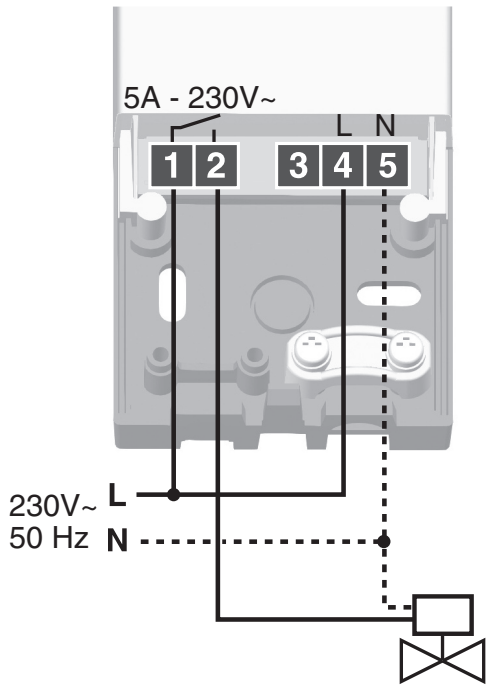


MODE : HEAT - COOL - HEAT/COOL

1st ON



230V~
50 Hz



COOL

......

HEAT

......

HEAT/COOL

......



1

ON

230V~
50 Hz

2



>3s

3

rF00

- mode +

0 0 0

>3s

4

+

rF00

...

rF01

OFF

5

rF01

- mode +

0 0 0

EXIT



1

ON

230V~
50 Hz

2

>3s

3



>3s

0 0 0

0 0 0

0 0 0

0 0 0

0 0 0

0 0 0

0 0 0

4

OFF

OK

